

Mitutoyo

Mitutoyo Quality

High-End CNC Rockwell Hardness Testing Machine HR-600 Series

TEST EQUIPMENT AND
SEISMOMETERS



Go above and beyond.

HR-600 *SERIES*

High-End CNC Rockwell Hardness Testing Machine


With innovative design and functionality that enables a wide variety of measurements, the HR-600 Series delivers hardness testing that defies conventional thinking.

The HR-600 Series combines the functionality of two previous models: one for Rockwell hardness testing and the other for Brinell hardness testing. Supporting both test types on a single machine, this new series expands the range of available measurements.

With its high-resolution scale load cell developed uniquely by Mitutoyo that allows for high-precision test load feedback control and state-of-the-art design that delivers both aesthetics and usability on the ground, the new HR-600 Series enables hardness testing that defies conventional thinking.



Mitutoyo

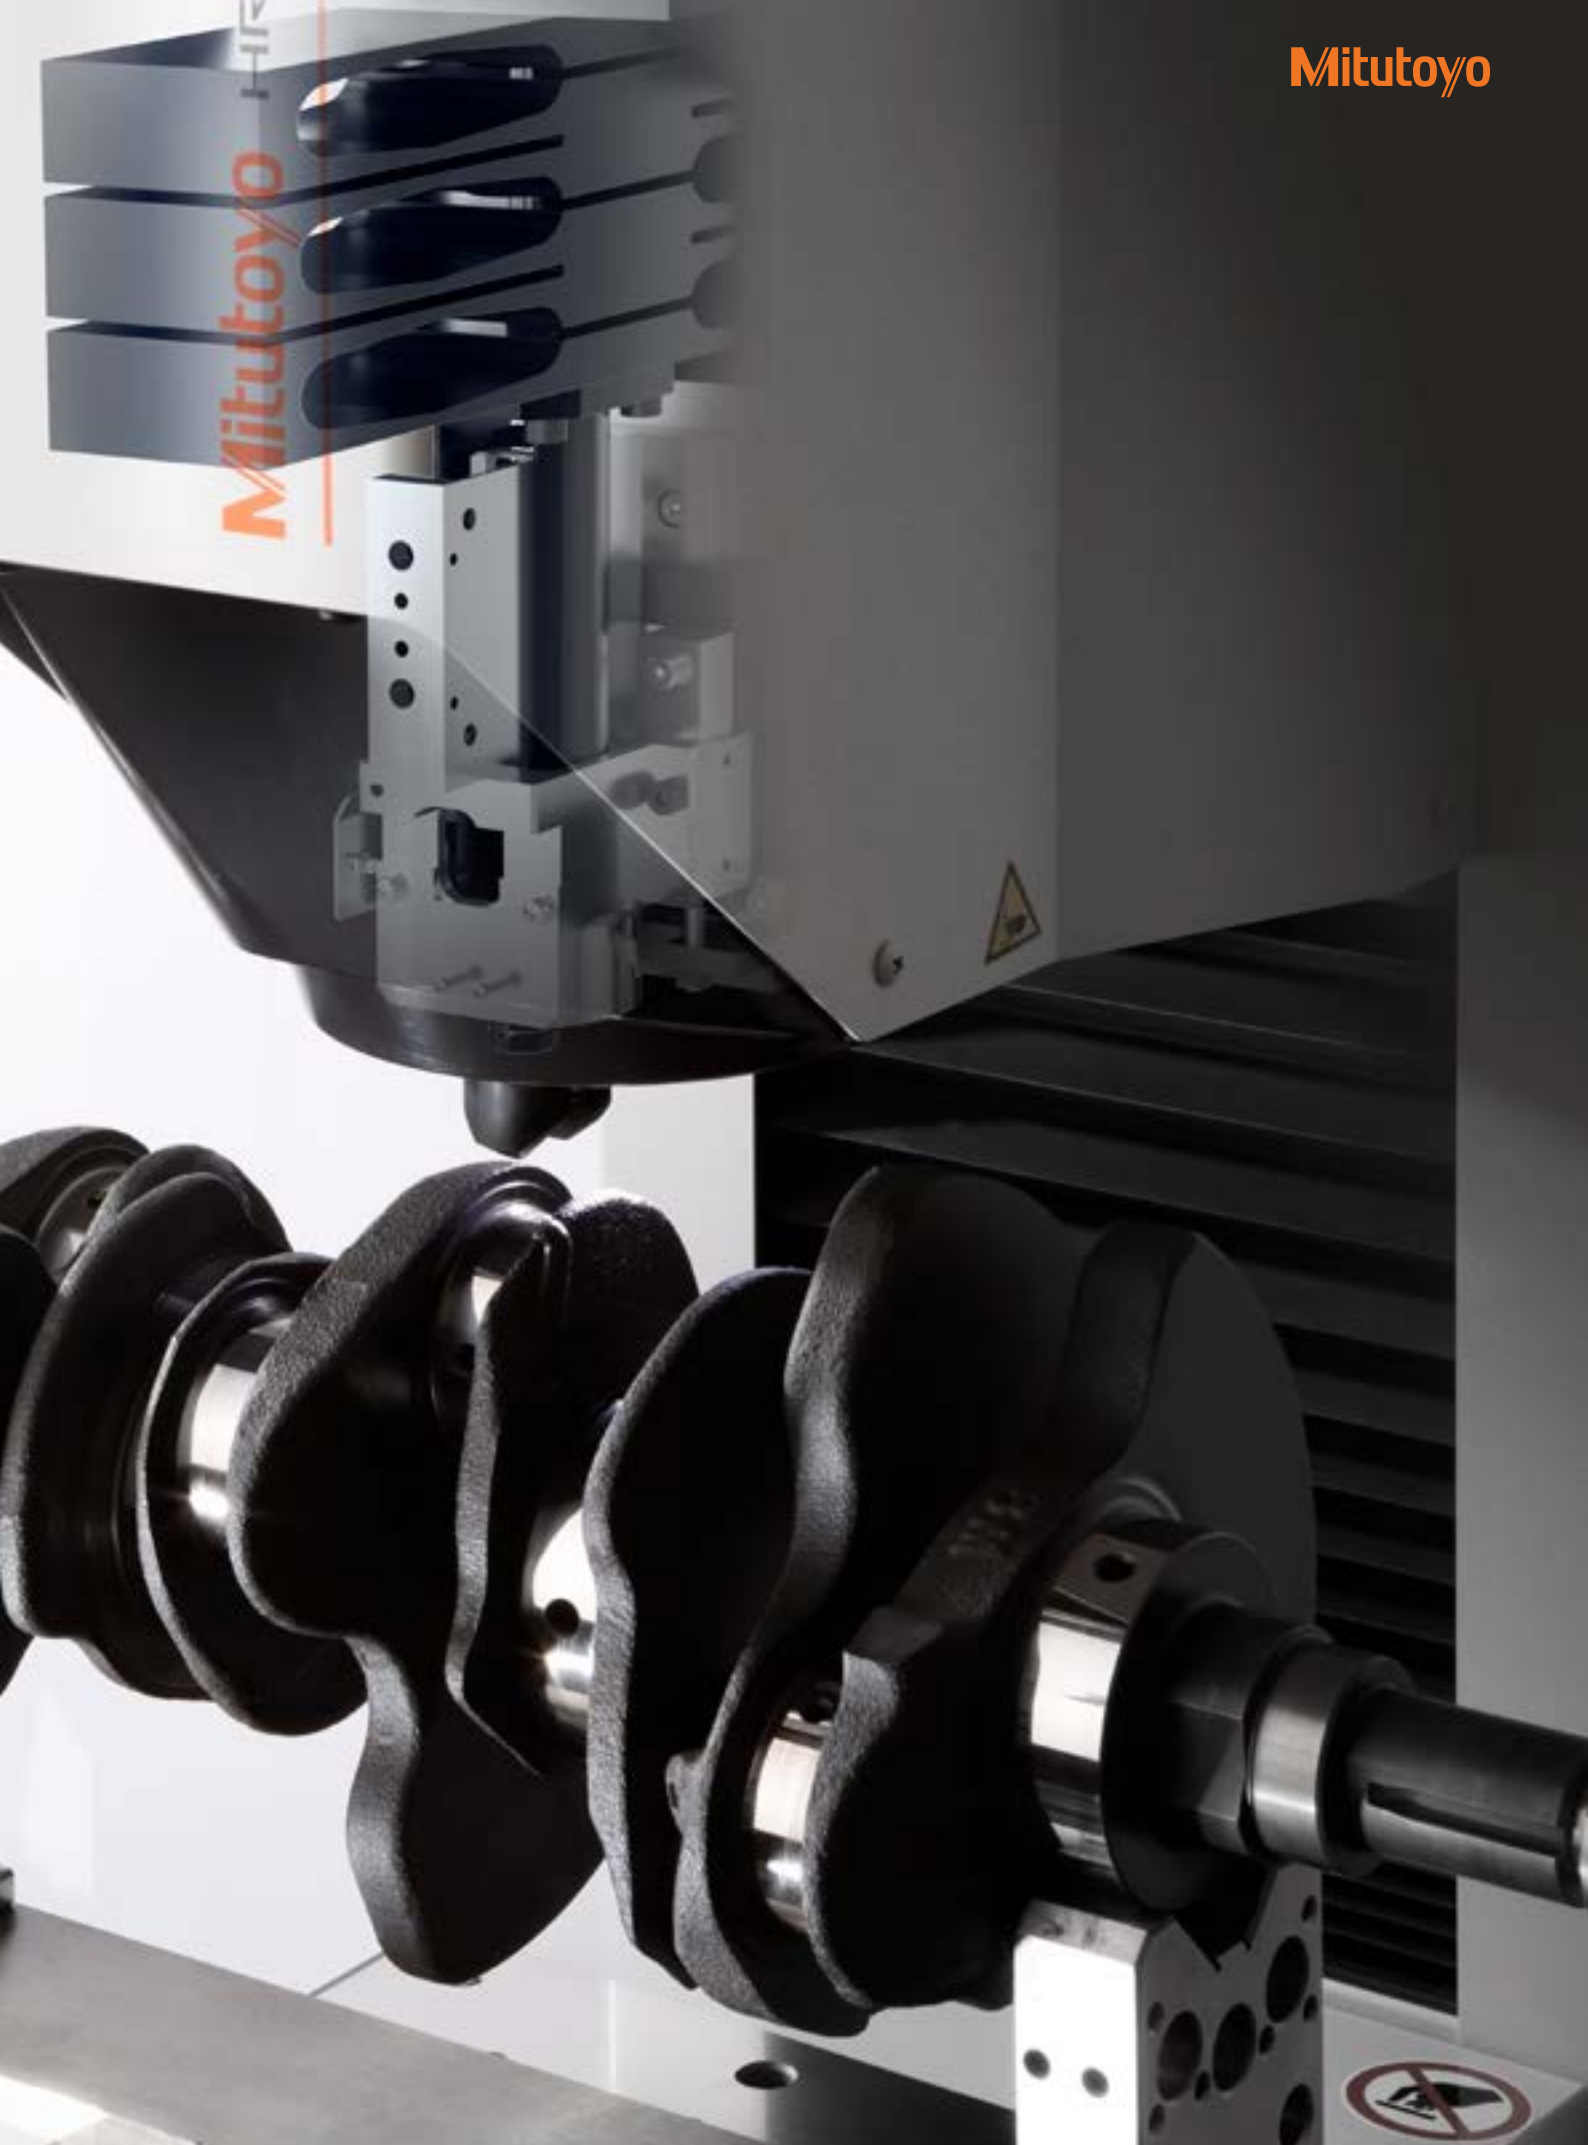

LINE-UP



HR-610A

Standard Rockwell hardness testing machine model with moving head

Maximum table loading 100 kg
 Maximum workpiece height 250 mm
 Depth (from indenter center) 220 mm
 Test force 29.42 - 1839 N (3 - 187.5 kgf)



HR-620A

Rockwell hardness testing machine with high added value that can measure micro-Brinell hardness and the hardness of plastics

Maximum table loading 100 kg
 Maximum workpiece height 250 mm
 Depth (from indenter center) 220 mm
 Test force 9.807 - 2452 N (1 - 250 kgf)

HR-620B

Fully automatic multi-point Rockwell hardness testing machine with Y-axis stage mobility that can measure micro-Brinell hardness and the hardness of plastics, and also supports multi-point inspection

Maximum table loading 100 kg
 Maximum workpiece height 250 mm (with X-axis stage: 165 mm)
 Depth (from indenter center) 220 mm
 Test force 9.807 - 2452 N (1 - 250 kgf)

Supports Rockwell and Brinell hardness testing on a single machine. Focused on usability on-the-ground.

The HR-600 Series, in addition to a standard Rockwell hardness testing model, offers machines with high added value that can test micro-Brinell hardness and the hardness of plastics as well, and also a lineup of models with Y-axis stage mobility that support fully automatic multi-point Rockwell hardness testing. Its key focus is on usability on the ground, where a wide range of materials — from metals to plastics — may need to be tested.



HR-620B (PC TYPE)

The PC TYPE model allows users to view measurement data on large-screen PC monitors
Other features are the same as HR-620B

Maximum table loading 100 kg
Maximum workpiece height 250 mm (with X-axis stage: 165 mm)
Depth (from indenter center) 220 mm
Test force 9.807 - 2452 N (1 - 250 kgf)

Note: HR-620B in above photo shown with X-axis stage (optional) installed.

DESIGN

New design with functional beauty

With a table for mounting workpieces and head with vertical mobility, the HR-600 Series is built for operability and usability.

Its new design is highly focused on end-user usability, and the entire product structure has been inventively modified for functional beauty — a true embodiment of Mitutoyo's pioneering spirit.



Design that pushes the boundaries of measurement diversity

First Mitutoyo hardness testers with moving heads



First Mitutoyo hardness testers ever to be equipped with moving heads (the head moves at a speed of 10 mm/s within a 210 mm range).

210 mm
Movement along Z-axis [drive unit]

10 mm/s
Speed along Z-axis [drive unit]

Larger tables expand the range of measurements



Tables were too small and lacked depth; large workpieces could not be mounted or measured.

Maximum loading 20 kg
Depth (from indenter center) 150 mm



Tables are bigger and have more depth, allowing large workpieces to be mounted and measured as is.

Maximum loading 100 kg
Depth (from indenter center) 220 mm

Large workpieces can be mounted easily



Large workpieces such as cylinder blocks can be mounted on the table as is.

Testing of heavy workpieces weighing up to 100 kg is supported.

WORKPIECE

Supports testing of a wide range of workpiece,
from metals to plastics

The HR-600 Series can test a wide variety of workpiece, ranging from those made of metal (crankshafts, cylinder blocks, etc.) to softer workpieces (brake pads, plastic parts, etc.), and supports both Rockwell and Brinell hardness testing on a single machine.

Crank shaft



The head moves vertically during testing to avoid colliding with the workpiece. Installing a sliding jig onto the fixed stage allows for efficient testing.

Plastic parts



Allows users to set sequences as required by the standards for testing plastic hardness (i.e. applying, maintaining, and removing the test load, and then reading the hardness value).

Cylinder head



Large and heavy cylinder heads that were difficult to measure using hardness testers with elevating tables can now be mounted and measured on a fixed stage.

Gear



Post-heat treatment hardness of multiple parts of gears (tooth flank, face and tip, etc.) can be tested.*

Cylinder block



Large and heavy cylinder blocks that were difficult to measure using hardness testers with elevating tables can now be tested by mounting them on a fixed stage.

Brake pads



Supports HRR and HRS, which use ball indenters, and other scales as well.*

* Models providing Y-axis stage mobility (for multi-point testing of a single specimen and simultaneous testing of multiple specimens) and X-axis stages (optional) also available.

USABILITY

Enhanced usability and operability effectively reduce measurement/analysis time

The display screen lets you view test results on the spot. You can choose from five displays (see page 11), according to what you need to view. The screens are touch-screen enabled to deliver excellent usability.

The HR-600 Series also offers many features useful for measurement and analysis, such as those that allow the user to directly select the hardness scale of their choice and statistical analysis features that can help them analyze multiple test results. Its enhanced usability will streamline your workflow by reducing measurement and analysis time and in other ways as well.





Standard operating display

Displays test results and conditions. All information can be viewed on a single screen.



Simple display

Displays test results and scales only, and provides an at-a-glance view of test conditions, making it suitable for tests that are repeated under the same conditions.



Multi-point test display

Navigation feature informs users of set test points. Users can perform multi-point tests, such as the Jominy test, through simple operations.



List display (mean value)

Displays the mean hardness value averaged over multiple points arbitrarily specified. The average of five test results is displayed in large font.



List display (5-point display)

Displays the five most recent test results in list format. Suited for checking the order and average values of test results, and also variations in the results.



Direct hardness scale selection

Users can directly select the hardness scale (determined by the test force and indenter) of their choice from the touch screen. The initial test force and total test force are automatically set according to the selected scale.



Curved surface compensation feature

The curved-surface correction function enables curved surfaces, such as round bars and concave or convex shapes, to be tested for hardness as easily as flat surfaces.



Statistical analysis

Quality management decisions based on hardness testing of industrial materials are made using multi-point test results. The statistical analysis feature, which can calculate the maximum, minimum, average, standard deviation and other values, is useful for analyzing multi-point test results.



A touch screen that can toggle between different views enables excellent control of a rich palette of features.

SOFTWARE AVPAK V3

Enables smooth and efficient measurements

AVPAK, using part programs, enables automated multi-point testing in the X-, Y- and Z-axis directions.



Other software

For display unit type

EXPAK
 <Data Processing Software>



Software you can use to create test reports, perfect for evaluating hardened layers in steel alloys. Equipped with a two-dimensional distribution visualization feature useful for evaluating work hardening and residual stress.

U-WAVE
 <Measurement Data Wireless Communication System>

With the U-WAVE system, you can wirelessly send and import measurement data to commonly used software (Excel, notepad, etc.).

AVPAK (Optional)

FORMEio
 <External Communication Program>



Software that enables external control of measuring instruments through PLC, allowing users to control them and monitor their status via RS-232C or LAN communication.

Note: FORMEio upgrades for AVPAK compatibility also available (V4.0 and later).

MeasurLink
 <Measurement Data Network System>



An IoT platform that visualizes quality by collecting data from measuring instruments in real time and then centrally managing and statistically processing this data.


AUTOMATION

Build a system that caters to the needs on the ground

By installing an X-axis stage on an HR-620B machine and creating a system that coordinates with robots, you can automate the testing procedure, from mounting workpieces to sorting them according to test results.



Example of Rockwell hardness testing machine automation on a production line

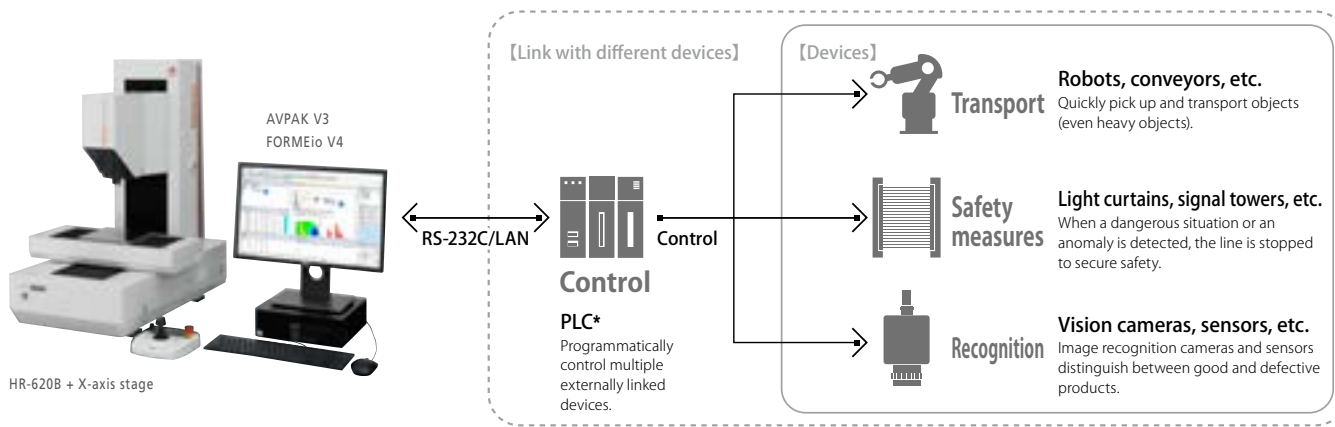

* Programmable Logic Controller

OPTION



Enables testing of a wide range of materials and supports special tests as well.

We offer useful items such as PCs for remote operation software and V-anvils for round workpieces.

The HR-600 Series supports testing of a wide range of materials — from hard metals to thin, soft plastics — and also special tests, such as simultaneous testing of multiple materials.

Testing machine rack A

Rack for standard-type HR-610A/HR-620A models.



Number of casters: 4
Dimensions (WxDxH): 760x560x642 mm

Display unit

Touch screen enabled color display with a rich choice of features. Standard accessory for HR-610A and HR-620A; special accessory for HR-620B.



Control software AVPAK

Software that controls tests and handles their status and results, all as one consistent workflow.



Testing machine rack B

Rack for HR-620B.



Number of casters: 4
Dimensions (WxDxH): 910x820x642 mm

X-axis stage

Two models, each with a different stage moving range (160 mm and 300 mm), are available.



Maximum loading: 50 kg

V-anvil

For testing round specimens.



Minimum diameter: 20 mm
Maximum diameter: 55 mm



Contactor (large)

Used with 5 mm, 10 mm, 1/4 in., and 1/2 in. indenters.



Carbide ball indenters (Brinell)

Four models (1 mm, 2.5 mm, 5 mm, and 10 mm) for Brinell/HBT* hardness testing.



* Brinell depth measurement

Digimatic Mini-Processor DP-1VA LOGGER

Small portable printer for statistical analysis and printing measurement data. Can store up to 1,000 pieces of data using its data logger feature. Can be connected to a PC using USB cable.



Digimatic Gage/PC Data Input Device USB Input Tool Direct USB-ITN

Simply connect to your PC to import measurement data to Excel, notepad, etc.



Measurement Data Wireless Communication System U-WAVE


Lets you easily import measurement data to your PC via wireless communication.



Foot switch

Enables operator to start test sequence while keeping both hands free.



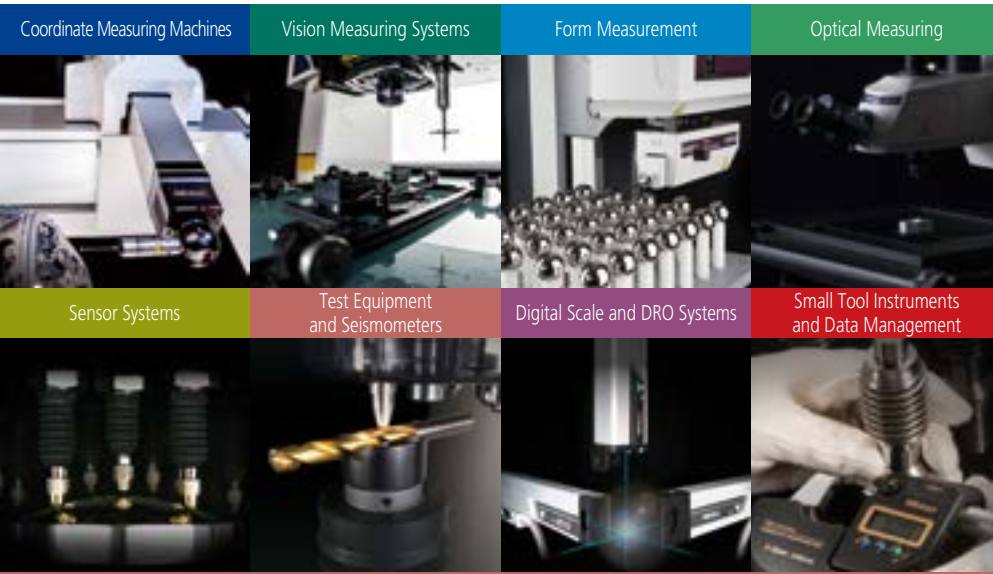

Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver bespoke measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MITUTOYO and MiCAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions.

Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.

Our products are classified as regulated items under Japanese Foreign Exchange and Foreign Trade Law. Please consult us in advance if you wish to export our products to any other country. If the purchased product is exported, even though it is not a regulated item (Catch-All controls item), the customer service available for that product may be affected. If you have any questions, please consult your local Mitutoyo sales office



Mitutoyo Asia Pacific Pte. Ltd.

Company Reg No. 197800892N
24 Kallang Avenue, Mitutoyo Building, Singapore 339415
Tel: (65) 6294 2211 Fax: (65) 6299 6666
E-mail: mapsg@mitutoyo.com.sg

www.mitutoyo.com.sg | www.mitutoyo.com.my
www.mitutoyo.com.th | www.mitutoyo.co.id
www.mitutoyo.com.vn | www.mitutoyo.com.ph



Mitutoyo (Malaysia) Sdn. Bhd.
 Mah Sing Integrated Industrial Park,
 4, Jalan Utarid U5/14, Section U5, 40150
 Shah Alam, Selangor, Malaysia Tel: (60)
 3-7845 9318
 Fax: (60) 3-7845 9346
 E-mail: mmsb@mitutoyo.com.my
Penang Branch
 Tel: (60) 4641 1998 Fax: (60) 4641 2998
Johor Branch
 Tel: (60) 7352 1626 Fax: (60) 7352 1628

Mitutoyo (Thailand) Co., Ltd.
 76/3-5, Chaengwattana Road, Kwaeng
 Anusaawaree, Khet Bangkaen, Bangkok
 10220, Thailand
 Tel: (66) 2080 3500
 Fax: (66) 2521 6136
 E-mail: office@mitutoyo.co.th
Chonburi Branch
 Tel: (66) 2080 3563 Fax: (66) 3834 5788
ACC Branch
 Tel: (66) 2080 3565

PT. Mitutoyo Indonesia
 Jalan Sriwijaya No.26
 Desa cibatu
 Kec. Cikarang Selatan
 Kab. Bekasi 17530, Indonesia
 Tel: (62) 21-2962 8600
 Fax: (62) 21-2962 8604
 E-mail: ptmi@mitutoyo.co.id

Mitutoyo Vietnam Co., Ltd.
 1st & 2nd Floor, MHDl Building,
 No. 60 Hoang Quoc Viet Road,
 Nghia Do Ward, Cau Giay District,
 Hanoi, Vietnam
 Tel: (84) 24-3768 8963
 Fax: (84) 24-3768 8960
 E-mail: mvc@mitutoyo.com.vn
Ho Chi Minh City Branch
 Tel: (84) 28-3840 3489
 Fax: (84) 28-3840 3498
Hai Phong City Branch
 Tel: (84) 22-5398 9909

Mitutoyo Philippines, Inc.
 Unit 1B & 2B LTI,
 Administration Building 1,
 Annex 1, North Main Avenue,
 Laguna Technopark, Biñan,
 Laguna 4024, Philippines
 Tel: (63) 49-544 0272
 Fax: (63) 49-544 0272
 E-mail: mpi@mitutoyo.com.ph